



EVM-3C-96



EVM-3S-48



EVM-R3



EVM-3S-72



EVM / EVM-R Series

3相/选择切换	最大值	最小值	报警输出	面板安装	导轨安装	只/箱
---------	-----	-----	------	------	------	-----

产品型号

EVM-3 -48	电压表		●	●			20
EVM-3 -72	电压表		●	●			16
EVM-3 -96	电压表		●	●			12
EVM-3C -48	电压表 (带触点输出)		●	●	●		20
EVM-3C -72	电压表 (带触点输出)		●	●	●		16
EVM-3C -96	电压表 (带触点输出)		●	●	●		12
EVM-3S -48	3相电压表 (选择切换)	●				●	20
EVM-3S -72	3相电压表 (选择切换)	●				●	16
EVM-3S -96	3相电压表 (选择切换)	●				●	12
EVM-R3	电压表 (导轨安装)		●	●			16
EVM-R3C	电压表 (带触点输出, 导轨安装)		●	●	●		16
EVM-R3S	3相电压表 (选择切换, 导轨安装)	●				●	16

- 真实有效值 RMS 测量。
- 非可燃性外壳
- 双重保护 ( ),
- 测量类别 III
- 端子型连接









- 面板安装及背后端子。
- IP40 (前面板)
- 工作环境温度: -5°C, +50°C。

- IEC 61000-6-2,
- IEC 61000-6-4,
- IEC 61010-1






型号	Panel-Mount			Rail-Mount		
	EVM-3	EVM-3C	EVM-3S	EVM-R3	EVM-R3C	EVM-R3S
规格						
电力参数	230 V AC* ±10%, 50/60 Hz					
工作电压(Un)	230 V AC* ±10%, 50/60 Hz					
电网类型	单相 / 2 线		3相 / 4 线	单相 / 2 线		3相 / 4 线
精确度	1% ±1 digit					
测量范围	10 - 600 V AC		10 - 300 V AC (L-N) 10 - 500 V AC (L-L)	10 - 600 V AC		10 - 300 V AC (L-N) 10 - 500 V AC (L-L)
仪表自身功耗	< 4 VA					
功耗分布	< 1 VA					
输出触点	-	1 NO, 5 A 1250 VA	-	-	1 NO, 5 A 1250 VA	-
瞬间报警	-	1,5 x 设置点	-	-	1,5 x 设置点	-
滞后	-	4% x 设置点	-	-	4% x 设置点	-
延时	-	0 - 99,9 秒	-	-	0 - 99,9 秒	-
机械参数						
安装尺寸	48x96 mm (PR 20), 72x72 mm (PR 18), 96x96 mm (PR 19)			DIN III Type-Rail Mount (PK20)		
重量/只	0,3kg (PR20), 0,35kg (PR18), 0,4kg (PR19)			0,25 kg		
包装数量	20pcs (PR20), 16pcs (PR18), 12pcs (Pr19)			16 pcs		

线路连接图

(PR19- 96x96mm)

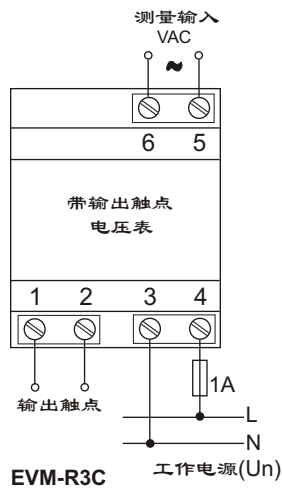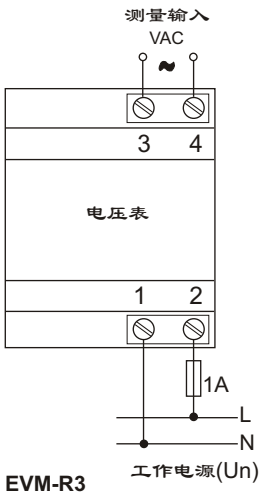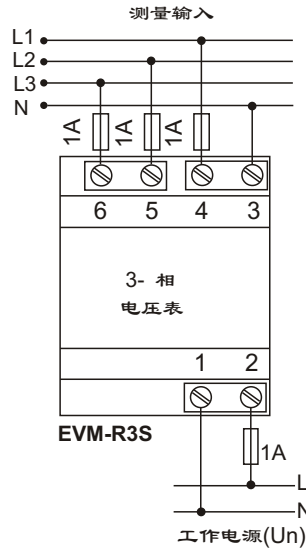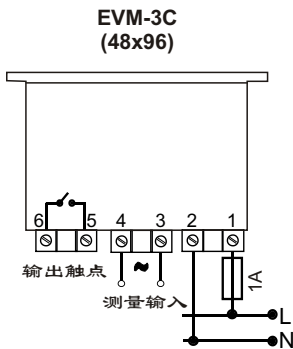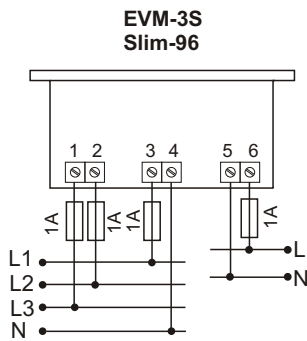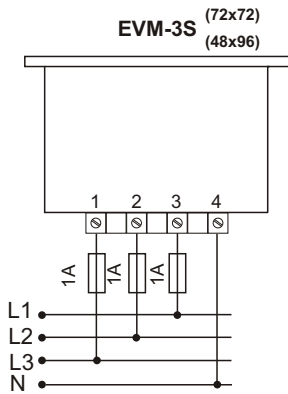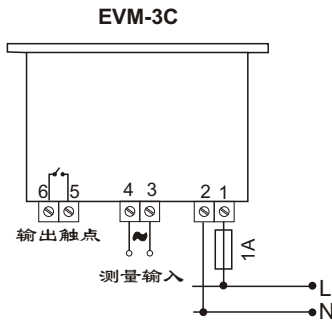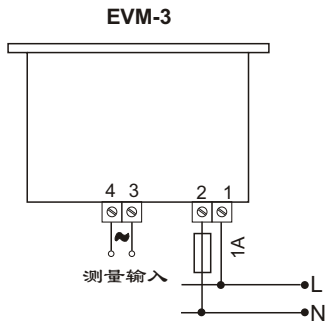

安装尺寸

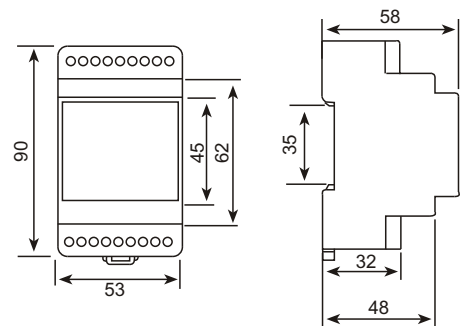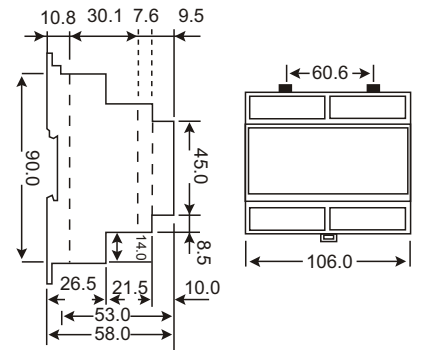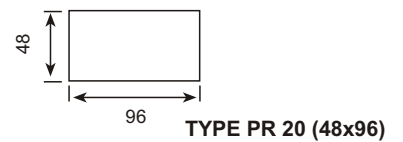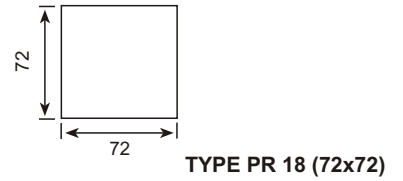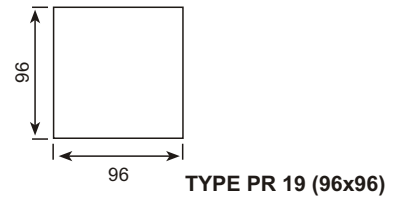

TYPE DIN / PK 26

TYPE PK 20

Connection diagrams are given for reference. Please always check latest the user manual given with product or download from [www.entec.com.tr](http://www.entec.com.tr).