



ECR-3-96

EFC-3-72

产品型号

ECR-3 -72	Cosφ 表 (0,1 Cap. - 0,1 ind.)	16
ECR-3 -96		12
EFC-3 -72	频率表 (20-400 Hz.)	16
EFC-3 -96		12

简介

ECR-3

数字式功率因数Cosφ表,测量电力系统的功率因数 Cosφ,指示负载系统是感性或容性.

EFC-3





数字式频率表, 测量电力系统的频率数据

- 非可燃性外壳
- 非可燃性外壳 ()
- 测量类别 III
- 端子型连接
- 面板安装及背后端子.
- IP40 (前面板)
- IEC 61000-6-2
- IEC 61000-6-4
- IEC 61010-1

型号	频率表	功率因数Cosφ表
规格	EFC-3	ECR-3
电力参数		
工作电压(Un)	230 V AC* ±10%; 50/60 Hz	
精确度	1% ±1 digit	2° ±1 digit
电流互感器比率	-	... / 5A
测量范围	20 - 400 Hz	0,00 - 0,99 (Ind. - Cap.)
测量电压	30 - 300 V	50 - 300 V
测量电流	-	100 mA - 5,5 A
测量频率	50/60 Hz	
显示	红色 LED , 12.4mm 高亮度	
机械参数		
工作环境温度	-5°C, +50 °C	
安装尺寸	72x72 mm (PR18), 96x96 mm (PR19), 48x96 mm (PR20)	
重量/只	0,3 kg (PR18), 0,4 kg (PR19), 0,3 kg (PR20)	
包装数量	16 pcs (PR18), 12 pcs (PR19), 20 pcs (PR20)	

线路连接图

(PR19- 96x96mm)

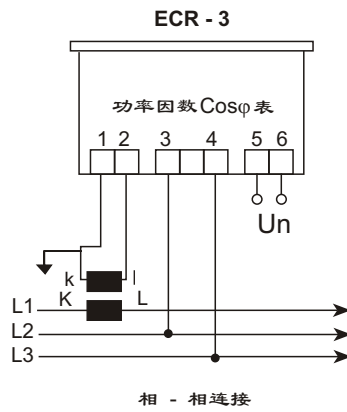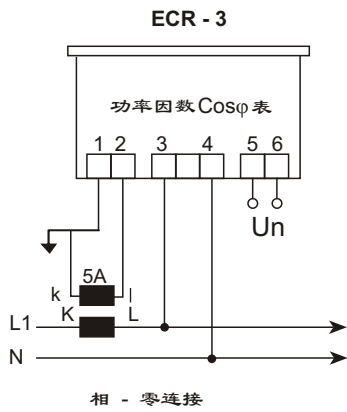

安装尺寸

